

SPALDING®

**Badminton Floor Sleeves
Model # 72468**

SPALDING SPECIFICATIONS

DATE: 01/01/06

MODEL NUMBER: 72468

DESCRIPTION: Badminton Floor Sleeves

GENERAL DIMENSIONS: The Spalding badminton floor plates are designed for use with Spalding's badminton systems that have 2" (76 mm) o.d. uprights (models 408140 and 408141). The floor plate package consists of one floor sleeve and one cover plate package. The cover plate is chrome plated steel and has a swivel cover that closes to flush with the floor when the badminton standard is not in use.


CONSTRUCTION:

Floor sleeves: Spalding floor sleeves are constructed of heavy duty steel tubing with a 2-1/16" (78 mm) inner diameter. This allows an easy installation of the uprights with minimal movement of the uprights after installation. The floor sleeves are 9-3/32" (231 mm) deep and have a baked blue powder coat finish.

Cover plate package: The cover plate outer ring shall be 6-3/4" (171 mm) in diameter and 1/4" (6.35 mm) thick, with a 4-1/4" (108 mm) diameter opening for the upright to be placed in the floor sleeves. The cover shall be 4-3/4" (121 mm) in diameter and .1196" (3 mm) thick and shall be hinged to the outer ring. The cover shall be seated in the outer ring so that it is flush with the floor surface when closed. The cover plate shall be attached to the floor with four 1/4" x 1-1/2" (6/35 mm x 38 mm) tapping screws. The cover plate and outer ring shall have a chrome plated finish.

SHIPPING INFORMATION:

1 package - 9 lb (4 kg), 6" x 9" x 9" (152 mm x 229 mm x 229 mm), 0.28 CF

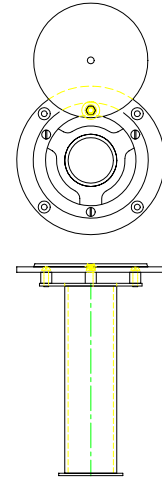

SPALDING SPECIFICATIONS

DATE: 01/01/06

MODEL NUMBER: 72468

DESCRIPTION: Badminton Floor Sleeves

GENERAL DIMENSIONS: The Spalding badminton floor plates are designed for use with Spalding's badminton systems that have 2" (76 mm) o.d. uprights (models 408140 and 408141). The floor plate package consists of one floor sleeve and one cover plate package. The cover plate is chrome plated steel and has a swivel cover that closes to flush with the floor when the badminton standard is not in use.

CONSTRUCTION:

Floor sleeves: Spalding floor sleeves are constructed of heavy duty steel tubing with a 2-1/16" (78 mm) inner diameter. This allows an easy installation of the uprights with minimal movement of the uprights after installation. The floor sleeves are 9-3/32" (231 mm) deep and have a baked blue powder coat finish.

Cover plate package: The cover plate outer ring shall be 6-3/4" (171 mm) in diameter and 1/4" (6.35 mm) thick, with a 4-1/4" (108 mm) diameter opening for the upright to be placed in the floor sleeves. The cover shall be 4-3/4" (121 mm) in diameter and .1196" (3 mm) thick and shall be hinged to the outer ring. The cover shall be seated in the outer ring so that it is flush with the floor surface when closed. The cover plate shall be attached to the floor with four 1/4" x 1-1/2" (6/35 mm x 38 mm) tapping screws. The cover plate and outer ring shall have a chrome plated finish.

SHIPPING INFORMATION:

1 package - 9 lb (4 kg), 6" x 9" x 9" (152 mm x 229 mm x 229 mm), 0.28 CF

