



# **SPALDING®**

**Divider Curtain  
Walk-Draw  
Model # 401-854**

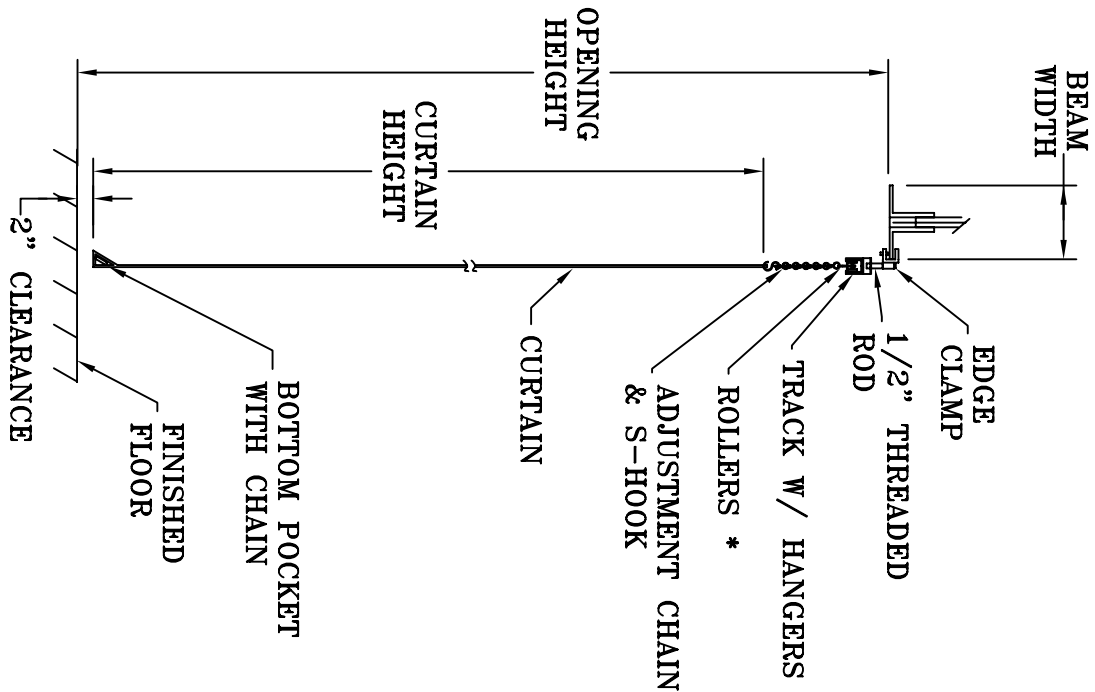

CARRIER GROMMETS  
APPROX. EVERY 12"

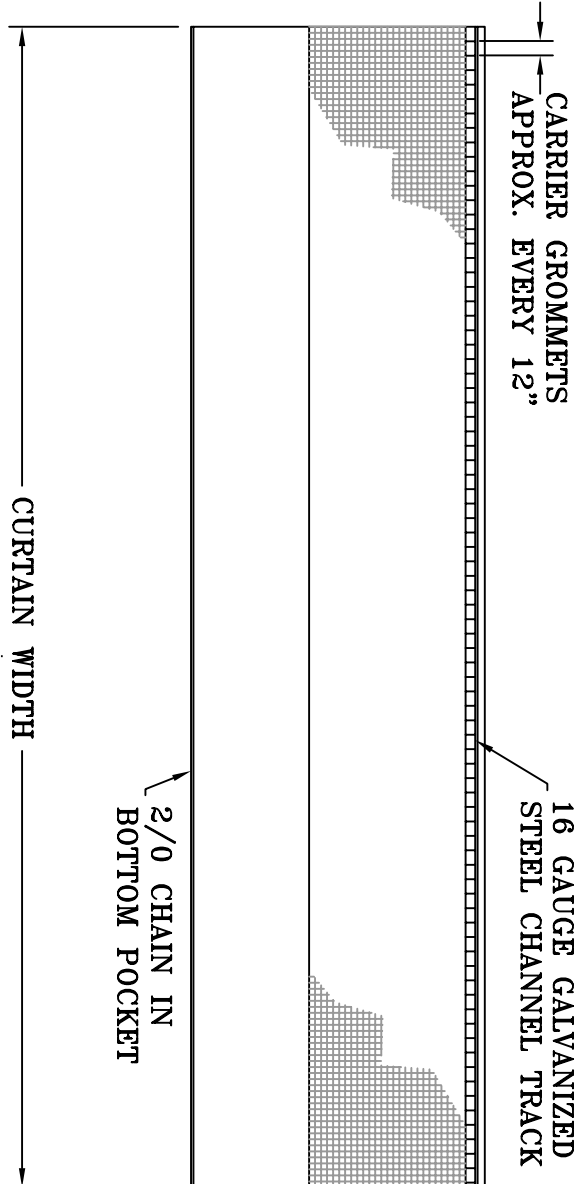

\* END CARRIERS SHALL CONSIST OF 1-1/8" DIAMETER STEEL BALL BEARING ROLLERS  
CENTER CARRIERS SHALL CONSIST OF 1-1/8" DIAMETER NYLON ROLLERS

**DIVIDER CURTAIN**  
**WALK-DRAW**

DO NOT SCALE

0401854



# SPALDING SPECIFICATIONS

DATE: 01/01/06

**MODEL NUMBER:** 0401854

**DESCRIPTION:** Divider Curtain - Walk-Draw

## **SPECIFICATIONS:**

Lower section of curtain shall be solid 18 oz. or 22 oz. vinyl coated polyester typically 8' in height with remainder in mesh. Flammability rated as self-extinguishing by the California State Fire Code. Upper section of the curtain shall be mesh woven from pigmented vinyl and polyester. Mesh flammability rated as self-extinguishing by the California State Fire Code. The colors of the vinyl and mesh shall be chosen from standard color offerings. All seams must be electronically welded with 1" outer edge hems. A 3" pocket shall be formed along the bottom edge of the curtain to accommodate the coil-proof chain installed by the curtain manufacturer.

Vinyl fabric shall form the top edge (mesh) of the curtain with grommets located 12" on center for attachment to carriers.

Track to be 16 gauges galvanized steel channel-type construction. Suspension of track with beam clamps shall not exceed 8'-0" on center.

Carriers will attach to the grommets in the top of curtain by means of chain and S-hook.

Carrier spacing shall be 12" on center across top of curtain. End carriers will be constructed of 1-1/8" diameter ball bearing wheels. Carriers yield a stack on curtain of 1-1/8" per foot when in the storage position.

Seams shall run vertical/horizontal pending the curtain type and size. Optional construction available in regard to vinyl and mesh combinations.

Approximate weight: ½ lb/ft<sup>2</sup>

Warranty: One-year limited on materials and workmanship